




# Panels

## Panel Assembly Standard High Temperature

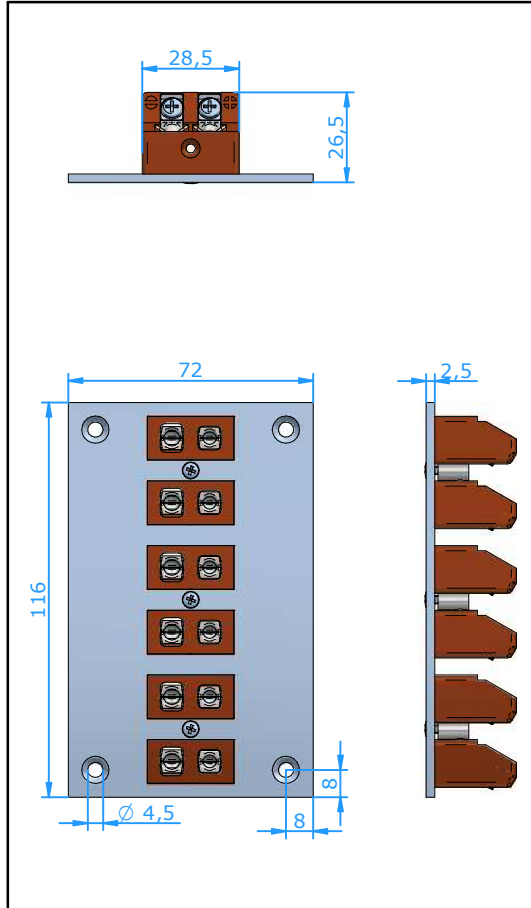

### Application

Panel assembly for thermocouple and RTD circuits for mounting in control rooms, test stands, laboratory applications, pilot plants, etc.

### Construction

Stainless Steel front panel for full corrosion protection fitted with the standard high temperature panel inserts PSIH-XX. For further details see separate specification sheets.

### Wire size

- Accepts wires up to 1,6 mm.

### Temperature rating

- 350 °C Maximum

**Ordering Code PASVHSS-x-y** x = number of circuits 1, 2, 3, 4, 5, 6  
y = calibration E, J, K, N, T, U, R/S, C, B

Calibration indicated by printing on brown body.

| Circuits | Panel dimension (L x H in mm) | Dimension panel cut-out (in mm) |
|----------|-------------------------------|---------------------------------|
| 1        | 72 x 116                      | 30 x 40                         |
| 2        | 72 x 116                      | 50 x 40                         |
| 3        | 72 x 116                      | 62 x 40                         |
| 4        | 72 x 116                      | 80 x 40                         |
| 5        | 72 x 116                      | 94 x 40                         |
| 6        | 72 x 116                      | 112 x 40                        |