




Panels

Panel Assembly Standard High Temperature Three Pin

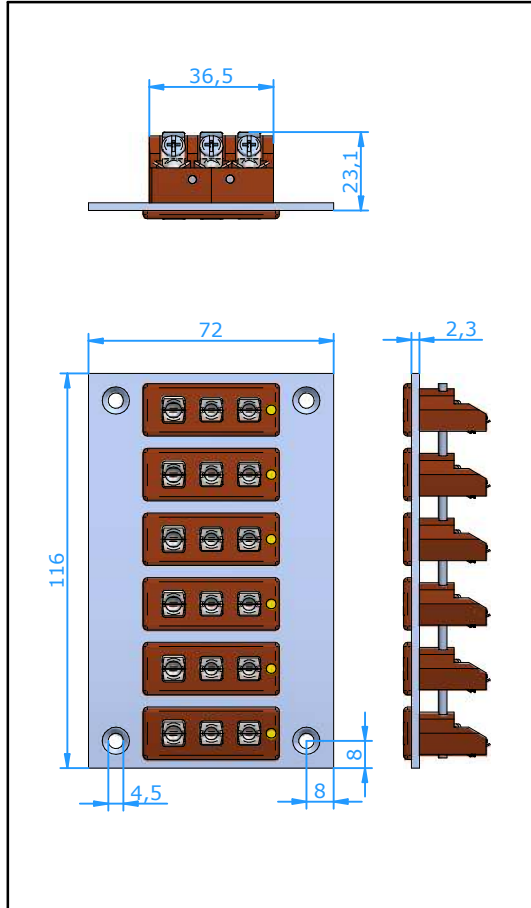

Application

Panel assembly for thermocouple and RTD circuits for mounting in control rooms, test stands, laboratory applications, pilot plants, etc.

Construction

Stainless Steel front panel for full corrosion protection fitted with the standard high temperature panel inserts PSIH-... For further details see separate specification sheets.

Wire size

- Accepts wires up to 3,0 mm.

Temperature rating

- 350 °C Maximum

Ordering Code PASVHT-x-yz

x = number of circuits
 y = calibration
 z = color code standard

1, 2, 3, 4, 5, 6
 E, J, K, N, T, U, R/S, C, B
 I = IEC, A = ANSI, D = DIN, J = JIS
 Calibration indicated by colored dot on black body.

Circuits	Panel dimension (L x H in mm)	Dimension panel cut-out (in mm)
1	72 x 116	30 x 45
2	72 x 116	50 x 45
3	72 x 116	62 x 45
4	72 x 116	80 x 45
5	72 x 116	94 x 45
6	72 x 116	112 x 45